


mixed friction range  5 bar  6 bar

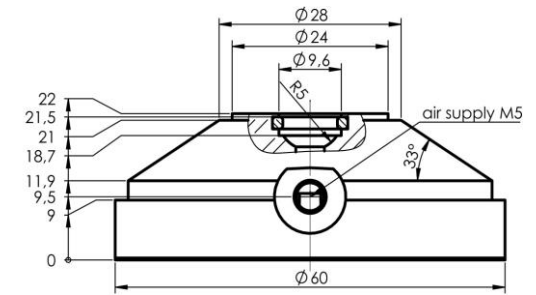

Thermodynamically optimized air cushion due to micro groove system.<sup>1)</sup> Bearing surface with dry running coating.

Air supply pressure <sup>2)</sup>	bar <sub>rel</sub>	5	6
Maximum carrying capacity	N	1150	1350
Nominal carrying capacity	N	860	1000
Gap height <sup>3)</sup>	μm	3.3	3.3
Static stiffness <sup>3)</sup>	N/μm	160	185
Air consumption <sup>3)</sup>	l/min	0.58	0.67
Maximum velocity <sup>3)</sup>	m/s	5	6
Weight	g	129	129

Air supply thread	M5
Adapted with pressure screw	EZ-0149/EZ-0150 M12x1-R5

<sup>1)</sup> Patents: US 6,164,827, DE 199 18 564 A1

<sup>2)</sup> deviating supply pressures on request

<sup>3)</sup> at nominal carrying capacity

Visit our website for information on bearing design and function, counterface and air quality requirements, and the definition of gap height.

Subject to technical modifications and typographical errors.