


mixed friction range 5 bar — 6 bar —

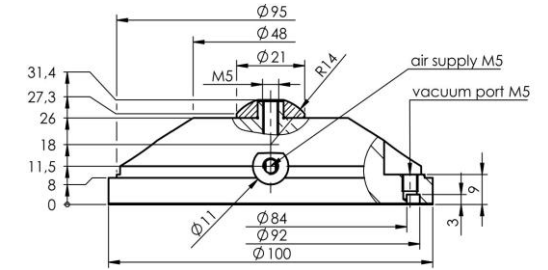

Thermodynamically optimized air cushion due to micro groove system.¹⁾ Bearing surface with dry running coating. Clean room bearing with additional air-extraction system.

Air supply pressure ²⁾	bar _{rel}	5	6
Maximum carrying capacity	N	1950	2350
Nominal carrying capacity	N	1100	1300
Gap height ³⁾	μm	11.5	11.5
Static stiffness ³⁾	N/μm	105	125
Air consumption ³⁾	l/min	5.8	7.1
Maximum velocity ³⁾	m/s	5	6
Weight	g	410	410

Air supply thread M5
Adapted with pressure screw EZ-0249 M24x1.5-R14

¹⁾ Patents: US 6,164,827, DE 199 18 564 A1

²⁾ deviating supply pressures on request

³⁾ at nominal carrying capacity

Visit our website for information on bearing design and function, counterface and air quality requirements, and the definition of gap height.

Subject to technical modifications and typographical errors.